




NEDLIGHTS

760W LED Top Light

Product Features



- Robust design and ultra-high efficacy
- Simplify maintenance with MD driver
- Chimney effect to avoid heat island formation
- Lightweight and best design in the industry
- Wired or wireless option
- Five-year warranty

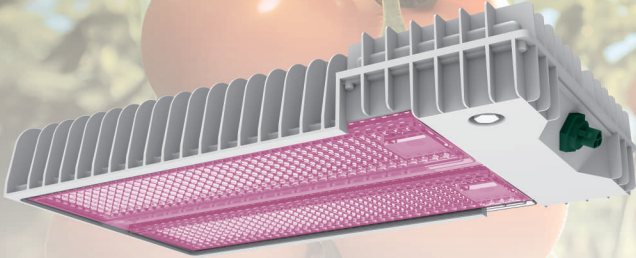


⚙️ Specs

Rated power(W)	760W
Input Voltage(VAC)	347-400VAC
Spectrum	R90G5B5/R85G5B5FR5
PPF(μmol/s)	2730μmol/s
Efficacy(μmol/J)	3.6μmol/J
IP Rate	IP65
Lifetime	50000 hr
Operating Temperature	0°C~40°C
Storage Temperature	-40°C~70°C
Certification	DLC, CSA, FCC, CE, CB, UKCA, TISI, RCM
Weight(kg)	7.5kg

☀️ Spectrum(optional)

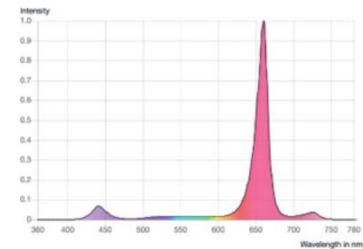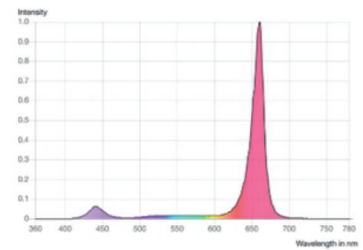

📏 Dimension(mm)

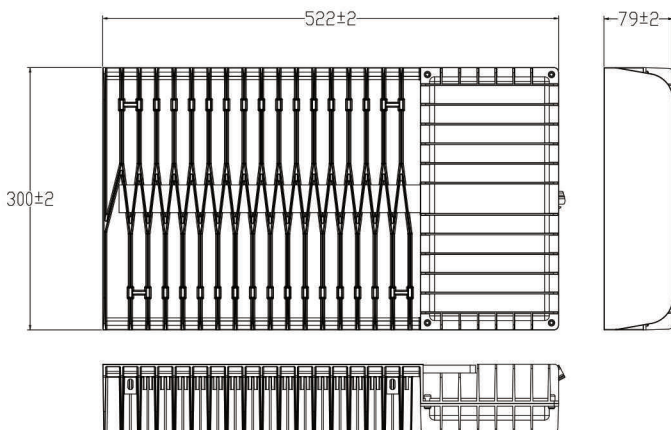

📐 Light distribution

